


Abzweig 45°, spritzgegossen

- voll druckbelastbar
- lange Schweißenden, für E-Muffen-Schweißung geeignet

Branch 45°, injection moulded

- in conformity with pressure class
- long welding ends, for the use of electrofusion sockets

AZ45 - 2021 #1

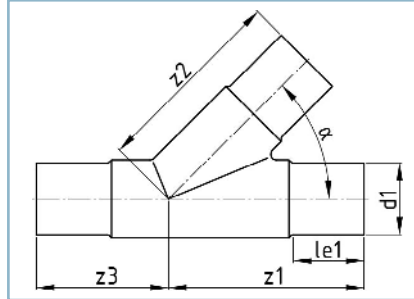

SDR

> 41

33

26

21

17,6

17

13,6

11

9

7,4

6

5

d ₁	l _{e1}	α	z ₁	z ₂	z ₃	Gewicht weight	
						kg	PE 100
40	45	45	120	120	85	0,2	
50	55	45	145	145	78	0,3	
63	63	45	159	156	86	0,5	
75	75	45	178	178	112	0,7	
90	85	45	233	233	136	1,4	
110	85	45	249	249	151	2	
125	105	45	290	290	150	3,2	
160	115	45	375	375	165	5,7	
180	116	45	384	384	191	7,9	
200	122	45	409	408	216	10,7	
225	135	45	485	485	220	14,9	


Abzweig 45°, spritzgegossen

- voll druckbelastbar
- lange Schweißenden, für E-Muffen-Schweißung geeignet

Branch 45°, injection moulded

- in conformity with pressure class
- long welding ends, for the use of electrofusion sockets

AZ45 - 2021 #1

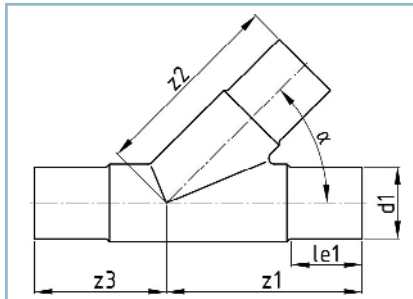

SDR

>41

33

26

21

17,6

17

13,6

11

9

7,4

6

5

d ₁	l _{e1}	α	z ₁	z ₂	z ₃	Gewicht weight	
						kg	PE 100
40	45	45	120	120	85	0,2	
50	55	45	145	145	78	0,3	
63	63	45	159	156	86	0,5	
75	75	45	178	178	112	0,7	
90	85	45	233	233	136	1,5	
110	85	45	249	249	151	2,3	
125	105	45	290	290	150	3,2	
160	115	45	375	375	165	6,3	
180	116	45	384	384	191	7,9	
200	122	45	409	408	216	10,7	
225	135	45	485	485	220	16,2	