


Y-Stück 45°

- voll druckbelastbar
- lange Schweißenden, für E-Muffen-Schweißung geeignet

Y-piece 45°

- in conformity with pressure class
- long welding ends, for the use of electrofusion sockets

HS45 - 2019 #1

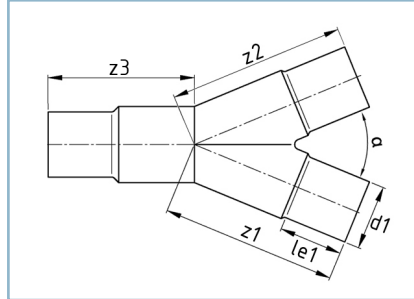

Toleranzen/tolerance (S./p. 11):

z_1, z_2, z_3 --> Tab./tab. 2

SDR

>41

33

26

21

17,6

17

13,6

11

9

7,4

6

5

d_1	l_{e1}	α	z_1	z_2	z_3	Gewicht weight kg
40	45	45	105	105	120	0,2
50	55	45	130	130	145	0,3
63	63	45	144	144	156	0,5
75	75	45	163	163	178	0,7
90	85	45	218	218	233	1,4
110	85	45	234	234	249	2
125	105	45	275	275	290	3,2
160	115	45	360	360	375	5,7
180	116	45	369	369	384	7,9
200	122	45	394	394	408	10,7
225	135	45	470	470	485	14,9


Y-Stück 45°

- voll druckbelastbar
- lange Schweißenden, für E-Muffen-Schweißung geeignet

Y-piece 45°

- in conformity with pressure class
- long welding ends, for the use of electrofusion sockets

HS45 - 2019 #1

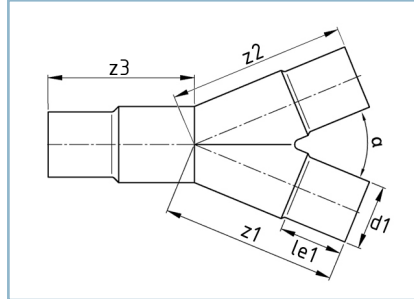

Toleranzen/tolerance (S./p. 11):
 z_1, z_2, z_3 --> Tab./tab. 2

SDR

>41

33

26

21

17,6

17

13,6

11

9

7,4

6

5

d_1	l_{e1}	α	z_1	z_2	z_3	Gewicht weight
						kg
40	45	45	105	105	120	0,2
50	55	45	130	130	145	0,3
63	63	45	144	144	156	0,5
75	75	45	163	163	178	0,7
90	85	45	218	218	233	1,5
110	85	45	234	234	249	2,3
125	105	45	275	275	290	3,2
160	115	45	360	360	375	6,3
180	116	45	369	369	384	7,9
200	122	45	394	394	408	10,7
225	135	45	470	470	485	16,2